




INDUSTRIAL AXIAL AND CENTRIFUGAL FANS


MARCH 2022 | INDIA



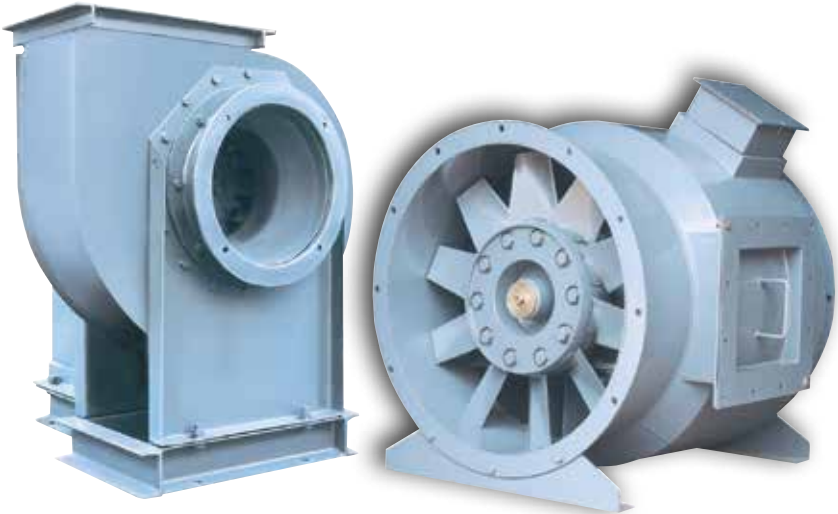

MARATHON™ FANS

Pioneer and acknowledged leader in Air Technology.

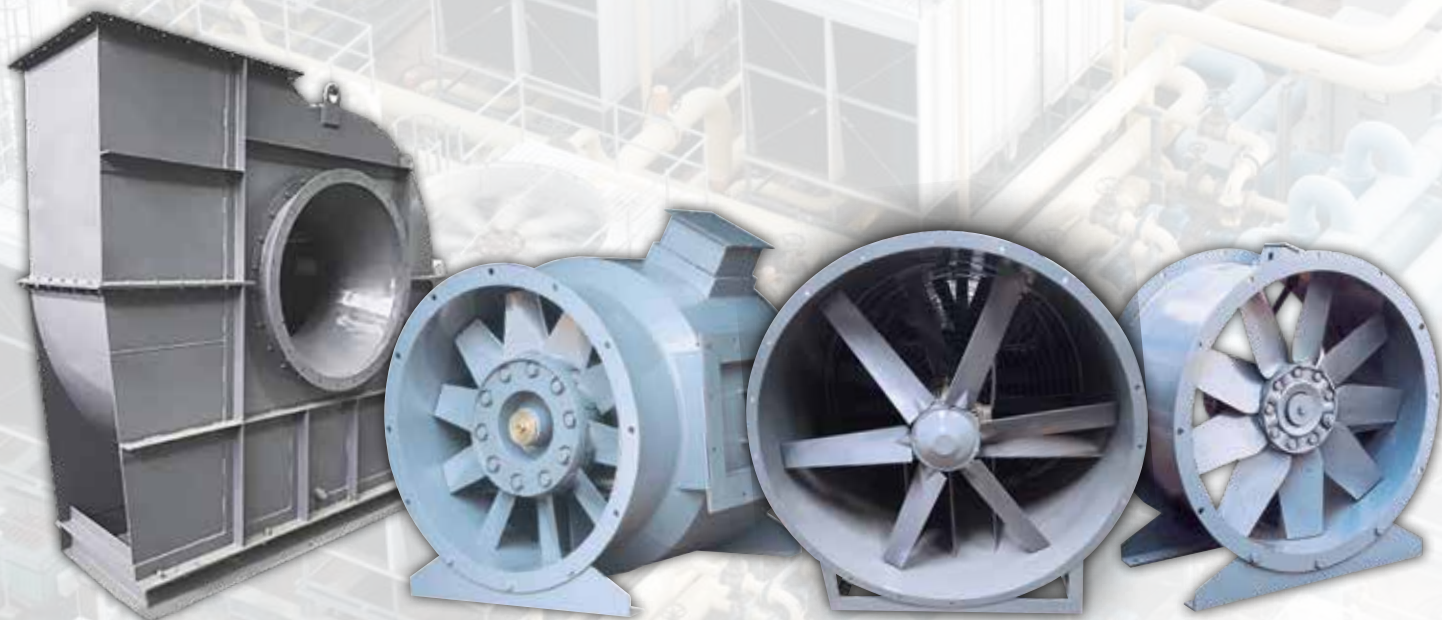

We offer a wide range of Axial Flow and Centrifugal Fans suitable for industrial ventilation, processed application like purging fan and dairy application, air conditioning, dust extraction, and fume extraction systems.

Custom built fans catering to the specific requirement of Steel Plant, Fertilizer Plant, Tea Industry, Mine, Ship, Power Plants (Thermal and Nuclear) Chemical Plant etc. are also available.



AXIAL FLOW FAN

FEATURES

Axial flow fans are available in wide range of combinations from 12" to 75" diameter fitted with motors from 0.37 kW to 110 kW in 2 Pole, 4 Pole, 6 Pole and 8 Pole variants. Motors are suitable for 415 volts $\pm 10\%$, 50 Hz $\pm 5\%$, 3 Phase Power Supply, as per IS:12615, which are in-house manufactured ensuring better fit and proper matching. Fans are available in single phase version also.

Axial Flow Fans are capable of handling up to 300000 m³/ hr air delivery and static pressure up to 110. Further pressure can be developed with multiple staging of fans.

CONSTRUCTION

Fan Casing is made of heavy gauge Mild Steel (MS) Sheet (as per IS-1079/ 2062) having robust construction. It has flanges at both ends for easy fixing on ducts/ walls.

Impeller is made of Die Cast aluminium (LM-6 of BS 1490/ IS 617 Gr. 4600) having aerofoil design with adjustable pitch angles. The solidity (No. of wings) is varied in order to use the most efficient part of the fan characteristics.

Axial Flow Fans are tested in accordance with IS-3588-1987. Standard fans are finished with Epoxy Paint.

Depending on application, fans can be supplied with casing made of stainless steel or zinc sprayed MS sheet. Epoxy paint may also be provided. Fans are available both in Wall Mounted and Duct Mounted configuration. Fan selection chart and general arrangement dimensions are given in Table -1 & 2 respectively. Following special application fans are also offered depending on application and end use.



BIFURCATED FANS

Marathon[®] Electric Bifurcated Fans are available from sizes 19" to 75". These fans are used to handle hazardous air, where motors are kept outside the air stream.



FLAME PROOF FANS

Marathon Electric Flame Proof Axial Fans are available from sizes 15" to 75" and are used extensively in Fire Hazard Areas.



ROOF EXTRACTOR UNIT

Marathon Electric Roof Extractor Units are available from sizes 19" to 60", fitted with Hood and Bottom Plate. These units are used on the roof to extract and exhaust contaminated air.



BELT DRIVEN FAN

Marathon Electric Belt Driven Fans are available from sizes 19" to 75". Fans are driven by belt and pulley arrangement. The motor is located outside the air stream.



Duct Mounted Fan



Wall Mounted Fan





SMOKE-SPILL FANS

This Fan is suitable for 250°C for 2 hrs operation.

- Air Flow – 3,300 – 80,000 m³/hr
- Static Pressure – 5mm to 100 mm wg
- Sweep – 12" to 48"
- Fan Performance – IS 3588

These fans are used for ventilation systems in case of fire when the polluted air needs to be ventilated outside with help of fans. These fans are placed on the opening to the environment which extracts smoke and releases it in the environment. It can be used for daily ventilation, as well as, smoke extraction in case of fire (suitable for 250°C for 2 Hours operation).



TEA INDUSTRY FANS

We have been supplying Withering Fans to various Tea companies all over India for more than 15 years. WITHERING is the first and foremost step involved in tea manufacture. Withering is the process of removal of moisture from green tea leaves by blowing hot air over the leaves in a withering trough.

The current of air performs two functions – 1) Conveyance of hot air to promote evaporation and 2) Carrying away the water vapour through a bed of green leaves.

Considering the above need and operating condition, we developed a series of Fans which are best suited for the Tea Industry.



TRANSFORMER COOLING FANS

This fan is primarily developed for Transformer cooling purposes and are widely used by reputed manufacturers like ABB®, Transformer and Rectifier®, TBEA®, etc. These fans operate mainly on Free Air Delivery condition.

OPTIONAL ACCESSORIES


The following optional accessories are also available.

- Louvre Shutter
- Wall Cowl and Bird Screen
- Filter / Filter Frame with adapter cone
- Dampers



*The following trademarks are not owned by or under the control of Regal Rexnord Corporation: ABB is a trademark or tradename of ABB Ltd; TBEA is a trademark or tradename of TBEA Co., Ltd.; Transformer and Rectifier is a trademark or trade name of Transformers & Rectifiers (India) Limited.

DIMENSIONAL DRAWINGS

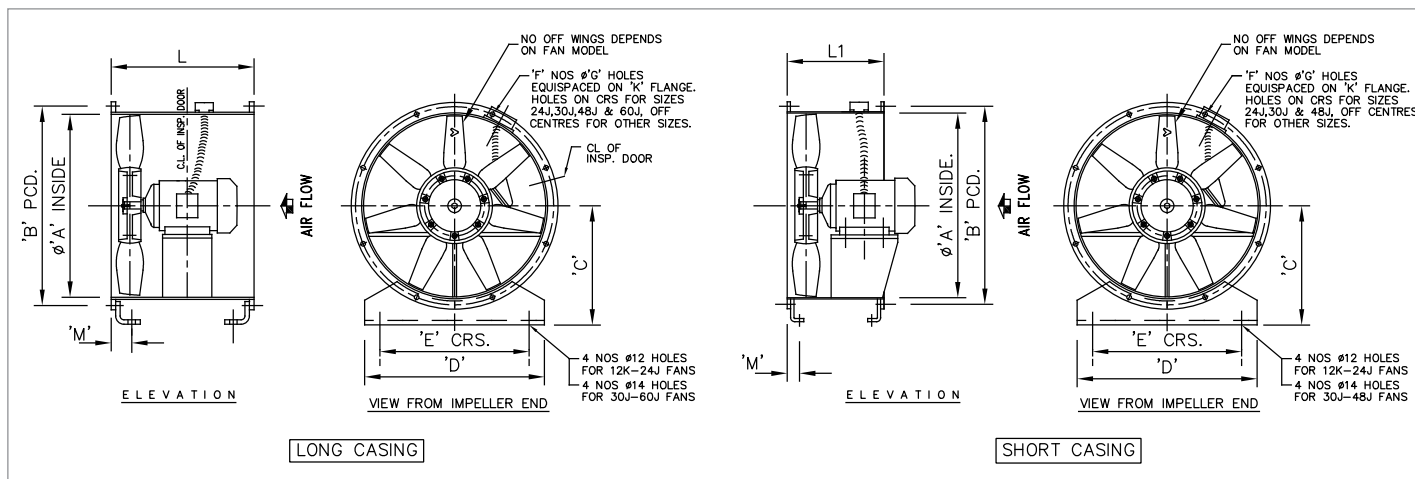

FAN MODEL	MOTOR RATING	L	L1	A	B	C	D	E	F	G	K	M	N
12K/ K37 P2	0.37 kW 2 POLE	380	225	305	349	203	305	273	8	10	40X6	36	14
12K/ K55 P2	0.55 kW 2 POLE												
15J/ K37 P4	0.37 kW 4 POLE	380	225	381	425	241	381	343	8	11	40X6	36	14
15J/ K75 P2	0.75 kW 2 POLE												
15J/ 1K1 P2	1.1 kW 2 POLE	406	225	483	541	311	483	483	8	14	40X6	36	14
15J/ 1K5 P2	1.5 kW 2 POLE												
19J/ K37 P4	0.37 kW 4 POLE	406	225	483	541	311	483	483	8	14	40X6	36	14
19J/ K75-P4	0.75 kW 4 POLE												
19J/ 1K5-P2	1.5 kW 2 POLE	420	225	483	541	311	483	483	8	14	40X6	36	14
19J/ 2K2 P2	2.2 kW 2 POLE												
19J/ 3K7 P2	3.7 kW 2 POLE	520	225	483	541	311	483	483	8	14	40X6	36	14
24J/ K37 P6	0.37 kW 6 POLE	406	225	610	668	381	610	559	12	14	40X6	36	18
24J/ K55 P6	0.55 kW 6 POLE												
24J/ K75 P4	0.75 kW 4 POLE	430	225	610	668	381	610	559	12	14	40X6	36	18
24J/ 1K1 P4	1.1 kW 4 POLE												
24J/ 1K5 P4	1.5 kW 4 POLE	460	225	610	668	381	610	559	12	14	40X6	36	18
24J/ 2K2 P4	2.2 kW 4 POLE												
30J/ K55 P6	0.55 kW 6 POLE	430	225	762	821	483	762	711	12	14	40X6	36	18
30J/ K75 P6	0.75 kW 6 POLE												
30J/ 1K1 P6	1.1 kW 6 POLE	450	225	762	821	483	762	711	12	14	40X6	36	18
30J/ 1K5 P6	1.5 kW 6 POLE												
30J/ 1K5 P4	1.5 kW 4 POLE	450	225	762	821	483	762	711	12	14	40X6	36	18
30J/ 2K2 P4	2.2 kW 4 POLE												
30J/ 3K7 P4	3.7 kW 4 POLE	480	280	762	821	483	762	711	12	14	40X6	36	18
30J/ 5K5 P4	5.5 kW 4 POLE												
38J/ 1K5 P6	1.5 kW 6 POLE	510	225	965	1035	597	965	914	16	18	65X6	36	18
38J/ 2K2 P6	2.2 kW 6 POLE												
38J/ 3K7 P6	3.7 kW 6 POLE	590	280	965	1035	597	965	914	16	18	65X6	36	18
38J/ 5K5 P6	5.5 kW 6 POLE												
38J/ 5K5 P4	5.5 kW 4 POLE	560	280	965	1035	597	965	914	16	18	65X6	36	18
38J/ 7K5 P4	7.5 kW 4 POLE												
38J/ 11K P4	11 kW 4 POLE	760	305	965	1035	597	965	914	16	18	65X6	36	18
38J/ 15K P4	15 kW 4 POLE												
38J/ 18K5 P4	18.5 kW 4 POLE	870	305	965	1035	597	965	914	16	18	65X6	36	18
48J/ 5K5 P6	5.5 kW 6 POLE	640	305	1219	1289	737	1220	1143	20	18	65X6	41	22
48J/ 7K5 P6	7.5 kW 6 POLE												
48J/ 11K P6	11 kW 6 POLE	770	305	1219	1289	737	1220	1143	20	18	65X6	41	22
48J/ 15K P6	15 kW 6 POLE												
48J/ 18K5 P6	18.5 kW 6 POLE	910	305	1219	1289	737	1220	1143	20	18	65X6	41	22
48J/ 18K5 P4	18.5 kW 4 POLE												
48J/ 22K P4	22 kW 4 POLE	870	305	1219	1289	737	1220	1143	20	18	65X6	41	22
48J/ 30K P4	30 kW 4 POLE												
48J/ 37K P4	37 kW 4 POLE	910	305	1219	1289	737	1220	1143	20	18	65X6	41	22
48J/ 45K P4	45 kW 4 POLE												
60J/ 18K5 P6	18.5 kW 6 POLE	1000	305	1526	1626	921	1524	1422	24	18	65X8	78	-
60J/ 30K P6	30 kW 6 POLE												
60J/ 37K P6	37 kW 6 POLE	1060	305	1526	1626	921	1524	1422	24	18	65X8	78	-
60J/ 45K P6	45 kW 6 POLE												
60J/ 55K P6	55 kW 6 POLE	-	-	-	-	-	-	-	-	-	-	-	-

- All dimensions are in mm subject to tolerance as per IS 2102
- Power Supply 415 V ± 10%, 3 PH, 50 Hz ± 5%, AC
- Motor Degree of protection: IP-55
- Motor Class of Insulation: 'F' (temp limited to class 'B')
- Painting Specification - 1 Coat of primer & 1 coat of synthetic enamel paint of colour D. A. Grey

SELECTION CHART – STANDARD AXIAL FLOW FAN

SL. NO.	FAN MODEL	FANDIA (mm)	MOTOR RATING (kw/pole)	MOTOR F/S (rpm)	FREE AIR (m3/hr)	VOLUME FLOW (m3/hr) AT DIFFERENT STATIC PRESSURE (mmwg)														
						5	10	15	20	25	30	35	40	50	60	70	80	90	100	110
1	12K/K37-P2	305	0.37/2	2800	2300	-	2000	1750	1400	-	-	-	-	-	-	-	-	-	-	-
2	12K/K37-P2	305	0.37/2	2800	3900	-	3200	3000	2650	-	-	-	-	-	-	-	-	-	-	-
3	12K/K55-P2	305	0.55/2	2800	4400	-	3850	3650	3300	-	-	-	-	-	-	-	-	-	-	-
4	15J/K37-P4	381	0.37/4	1440	1750	1400	850	-	-	-	-	-	-	-	-	-	-	-	-	-
5	15J/K37-P4	381	0.37/4	1440	4500	3700	3100	-	-	-	-	-	-	-	-	-	-	-	-	-
6	15J/K55-P2	381	0.55/2	2850	4500	-	4100	3900	3700	3300	3000	2600	-	-	-	-	-	-	-	-
7	15J/K75-P2	381	0.75/2	2850	5600	-	5300	5100	5000	4600	4300	3700	-	-	-	-	-	-	-	-
8	15J/1K1-P2	381	1.1/2	2850	7200	-	6700	6500	6200	5700	5400	5000	-	-	-	-	-	-	-	-
9	15J/1K5-P2	381	1.5/2	2850	8500	-	8000	7850	7300	7100	6800	6300	-	-	-	-	-	-	-	-
10	19J/K37-P4	483	0.37/4	1440	6750	6000	5500	4400	-	-	-	-	-	-	-	-	-	-	-	-
11	19J/K75-P4	483	0.75/4	1440	8600	8000	7500	6200	-	-	-	-	-	-	-	-	-	-	-	-
12	19J/1K5-P2	483	1.5/2	2900	7500	-	-	-	6500	6200	6000	5800	5200	4500	3500	-	-	-	-	-
13	19J/2K2-P2	483	2.2/2	2900	11500	-	-	-	10000	9800	9500	9000	8600	7500	6500	-	-	-	-	-
14	19J/3K7-P2	483	3.7/2	2900	15300	-	-	-	14200	13850	13600	13100	12700	11700	10500	-	-	-	-	-
15	24J/K37-P6	610	0.37/6	940	4900	4000	2200	-	-	-	-	-	-	-	-	-	-	-	-	-
16	24J/K55-P6	610	0.55/6	940	11000	8700	8000	-	-	-	-	-	-	-	-	-	-	-	-	-
17	24J/K75-P4	610	0.75/4	1440	10000	-	9000	8300	7000	-	-	-	-	-	-	-	-	-	-	-
18	24J/1K1-P4	610	1.1/4	1440	13500	-	12000	10000	9800	-	-	-	-	-	-	-	-	-	-	-
19	24J/1K5-P4	610	1.5/4	1440	15500	-	13600	13000	11300	-	-	-	-	-	-	-	-	-	-	-
20	24J/2K2-P4	610	2.2/4	1440	17000	-	16500	15500	14000	-	-	-	-	-	-	-	-	-	-	-
21	24K/5K5-P2	610	5.5/2	2950	19500	-	-	-	18000	17900	17800	17100	16500	15500	14500	13500	12300	11000	-	-
22	24K/7K5-P2	610	7.5/2	2950	22500	-	-	-	21500	21250	21000	20500	20000	19000	18500	17500	16000	14500	-	-
23	24K/11K-P2	610	11/2	2950	28500	-	-	-	27000	26750	26500	26000	25500	24500	23000	22000	21000	20000	-	-
24	30J/K55-P6	762	0.55/6	940	10500	9500	8000	6000	-	-	-	-	-	-	-	-	-	-	-	-
25	30J/K75-P6	762	0.75/6	940	15000	13500	11750	9000	-	-	-	-	-	-	-	-	-	-	-	-
26	30J/1K1-P6	762	1.1/6	940	18000	17000	15000	12000	-	-	-	-	-	-	-	-	-	-	-	-
27	30J/1K5-P6	762	1.5/6	940	21500	20000	18000	15800	-	-	-	-	-	-	-	-	-	-	-	-
28	30J/1K5-P4	762	1.5/4	1450	14000	-	13000	12000	11300	10250	9000	8000	-	-	-	-	-	-	-	-
29	30J/2K2-P4	762	2.2/4	1450	18500	-	17000	15800	15000	14000	12800	11000	-	-	-	-	-	-	-	-
30	30J/3K7-P4	762	3.7/4	1450	22000	-	20500	19800	18500	17800	16500	14500	-	-	-	-	-	-	-	-
31	30J/5K5-P4	762	5.5/4	1450	34000	-	32000	31000	29000	27500	26000	24000	-	-	-	-	-	-	-	-
32	38J/1K5-P6	965	1.5/6	960	19500	-	17000	15250	13000	9800	-	-	-	-	-	-	-	-	-	-
33	38J/2K2-P6	965	2.2/6	960	25000	-	21500	19500	18000	14800	-	-	-	-	-	-	-	-	-	-
34	38J/3K7-P6	965	3.7/6	960	36500	-	33500	31500	29500	26500	-	-	-	-	-	-	-	-	-	-

- Fan selection is based on air at 20°C and density 1.2 kg/m3
- Fan performance and tolerance as per IS 3588 – 1987.
- For selection of Fans in other solidity (no of blades), or in intermediate performance point please refer to Regional/Branch Offices or Factory

SELECTION CHART – STANDARD AXIAL FLOW FAN

SL. NO.	FAN MODEL	FANDIA (mm)	MOTOR RATING (kw/pole)	MOTOR F/S (rpm)	FREE AIR (m3/hr)	VOLUME FLOW (m3/hr) AT DIFFERENT STATIC PRESSURE (mmwg)														
						5	10	15	20	25	30	35	40	50	60	70	80	90	100	110
35	38J/5K5-P6	965	5.5/6	960	45000	-	42000	39000	37000	34000	-	-	-	-	-	-	-	-	-	-
36	38J/5K5-P4	965	5.5/4	1475	30000	-	-	-	26000	25000	24500	23000	22000	18000	15000	-	-	-	-	-
37	38J/7K5-P4	965	7.5/4	1475	39000	-	-	-	35000	33000	32500	30500	30000	26000	22000	-	-	-	-	-
38	38J/11K-P4	965	11/4	1475	48000	-	-	-	46000	45000	44000	42500	41000	37500	32500	-	-	-	-	-
39	38J/15K-P4	965	15/4	1475	61000	-	-	-	56000	54500	54000	51500	51000	47000	44000	-	-	-	-	-
40	38J/18K5-P4	965	18.5/4	1475	68000	-	-	-	65000	63000	62000	60000	58500	54500	51000	-	-	-	-	-
41	48J/5K5-P6	1219	5.5/6	975	42000	-	-	-	36000	34500	30500	28000	22000	-	-	-	-	-	-	-
42	48J/7K5-P6	1219	7.5/6	975	55000	-	-	-	47000	45500	43000	39000	35000	-	-	-	-	-	-	-
43	48J/11K-P6	1219	11/6	975	72000	-	-	-	62000	59500	57000	52500	50000	-	-	-	-	-	-	-
44	48J/15K-P6	1219	15/6	975	83000	-	-	-	77000	74500	69000	67500	64000	-	-	-	-	-	-	-
45	48J/18K5-P6	1219	18.5/6	975	90000	-	-	-	85000	81000	75000	73000	70000	-	-	-	-	-	-	-
46	48J/18K5-P4	1219	18.5/4	1480	62000	-	-	-	-	-	-	-	-	50000	45000	41000	38000	35000	28000	-
47	48J/22K-P4	1219	22/4	1480	71000	-	-	-	-	-	-	-	-	59000	57000	54000	49000	44000	39000	-
48	48J/30K-P4	1219	30/4	1480	92000	-	-	-	-	-	-	-	-	80000	75000	70000	68000	62000	53000	-
49	48J/37K-P4	1219	37/4	1480	102000	-	-	-	-	-	-	-	-	88000	84000	80000	75000	71000	67000	-
50	48J/45K-P4	1219	45/4	1480	150000	-	-	-	-	-	-	-	-	102000	98000	95000	90000	85000	78000	-
51	60J/18K5-P6	1524	18.5/6	975	-	-	-	-	-	-	-	-	-	-	50000	40000	-	-	-	-
52	60J/22K-P6	1524	22/6	975	-	-	-	-	-	-	-	-	-	-	62000	50000	-	-	-	-
53	60J/30K-P6	1524	30/6	975	-	-	-	-	-	-	-	-	-	-	85000	69000	-	-	-	-
54	60J/37K-P6	1524	37/6	975	-	-	-	-	-	-	-	-	-	-	100000	90000	-	-	-	-
55	60J/45K-P6	1524	45/6	975	-	-	-	-	-	-	-	-	-	-	124000	108000	-	-	-	-
56	60J/55K-P6	1524	55/6	975	-	-	-	-	-	-	-	-	-	-	139000	127000	-	-	-	-
57	75J1/2/30K-P6	1905	30/6	975	-	-	-	-	-	-	-	-	-	110000	93000	80000	50000	-	-	-
58	75J1/2/37K-P6	1905	37/6	975	-	-	-	-	-	-	-	-	-	130000	115000	100000	60000	-	-	-
59	75J1/2/55K-P6	1905	55/6	975	-	-	-	-	-	-	-	-	-	180000	165000	150000	130000	-	-	-
60	75J/2/75K-P6	1905	75/6	975	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
61	75J/55K-P6	1905	55/6	975	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
62	75J/55K-P6	1905	75/6	975	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

- Fan selection is based on air at 20°C and density 1.2 kg/m3
- Fan performance and tolerance as per IS 3588 – 1987.
- For selection of Fans in other solidity (no of blades), or in intermediate performance point please refer to Regional/Branch Offices or Factory

CENTRIFUGAL FAN

FEATURES

Marathon offers a wide range of Centrifugal Fans with highly efficient impellers of type Backward Inclined, Backward Curved, Aerofoiled, Forward Curved and Straight Radial, depending upon application.

Marathon® Centrifugal Fans are suitable for air delivery up to 300,000 M³/ Hr and Static Pressure up to 800 MM WG. Fans are available both in single inlet single width (SISW) and in double inlet double width (DIDW) versions.

CONSTRUCTION

Centrifugal Fans are usually made of mild steel (IS 1079/ 2062) rigid casing with Inspection window and drain plug. The impeller is mounted on C-40 (IS 1570) shaft. Double Row Ball/ Spherical roller Bearings are used for smooth operation. Fans are either belt driven or direct coupled. Direct driven Fans, with Impeller mounted directly on motor shaft, are also available.

- Standard Fans are painted with Epoxy Paint.
- Other than mild steel, fans are offered in Stainless Steel and Aluminium Construction also, depending on application need.
- For High temperature (from 100°C to 350°C) application, Aluminium cooling disc is provided and the fan is painted with Heat Resistant Aluminium Paint.
- Centrifugal Fans are tested in accordance with IS-4894-1987/ AMCA-210


SPECIAL FEATURES

The following Special Features are provided depending application need.


- Spark Proof Construction
- Zinc Sprayed
- Synthetic Enamel Paint

The following optional accessories are also available.


- Common base frame for Fan and Motor
- V-belt drive set.
- Belt guard
- Motor slide rail
- Foundation bolt
- Filter
- Filter frame with adapter cone
- Inlet and outlet flexible connection
- Inlet box
- Inlet and outlet dampers
- Antivibration mounting




Backward inclind




Backward curved




Back Plate Paddle



Open Paddle



Forward Curved




Aerofoil






DISCHARGING ROTATION

Fans are available in different discharge angles from 0° to 315° both in left hand and right hand rotation viewing from motor end with motor position as X, Y, W & Z.

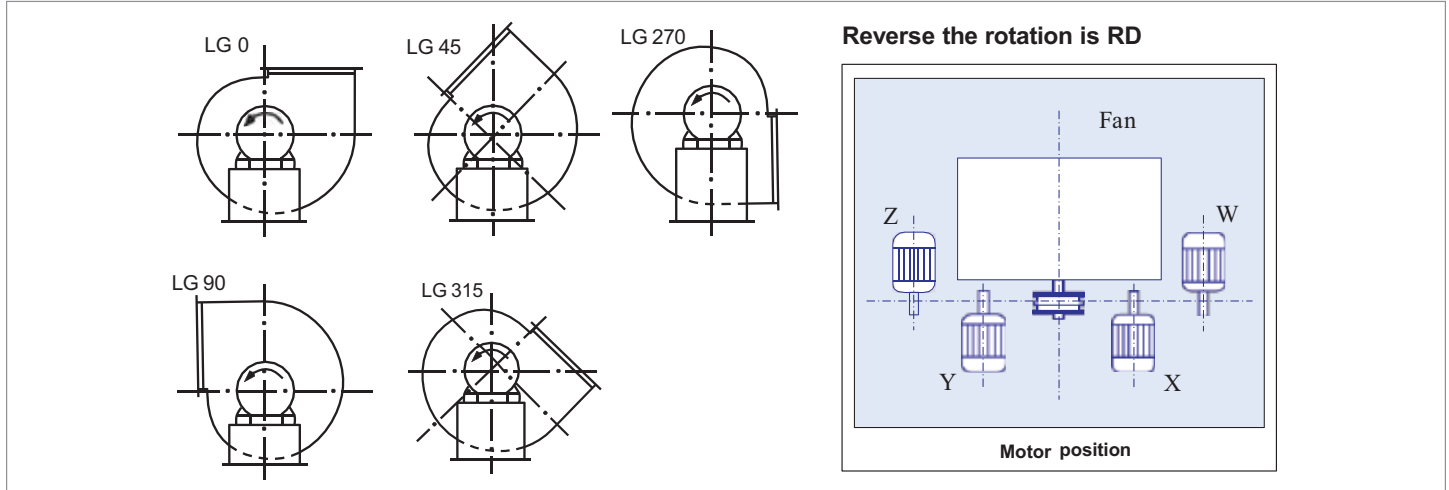


ARRANGEMENT

Fans are manufactured in five different drive arrangements depending upon application.

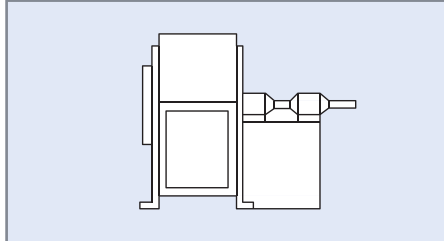


Arrangement 1 Single inlet pedestal

- For belt drive. Impeller overhung. Two bearings on full-depth pedestal.

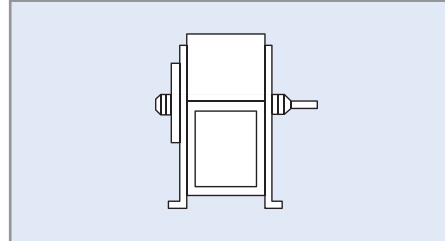


Arrangement 3 Single inlet bearer bar

- For belt drive. One bearing on each side of casing, supported by bearer bars.

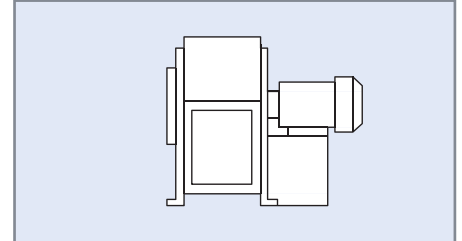


Arrangement 4 Single inlet direct drive and stool

- For direct drive. Impeller overhung on motor shaft. No bearings on fan. Motor feet supported by full-depth pedestal.

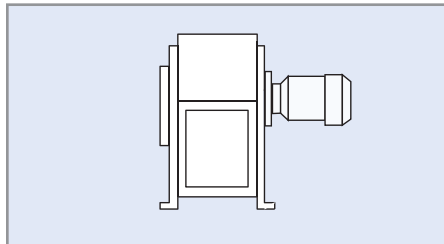


Arrangement 5 Single inlet direct drive, no stool

- For direct drive. Impeller overhung on motor shaft. No bearings on fan. Motor Bolted to fan casing by its flanged end shield.

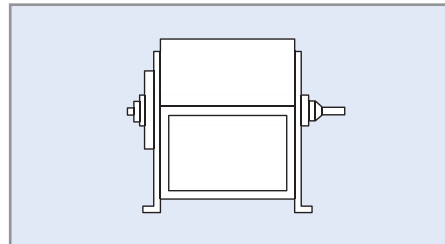

Arrangement 6 Double inlet bearer bar

- Double inlet, double width fan for belt drive. One bearing in each inlet, supported by bearer bars.

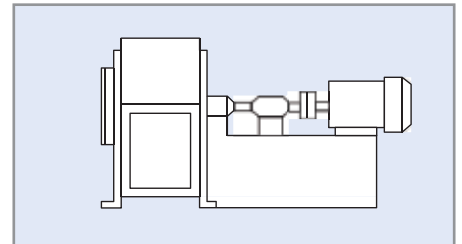

Arrangement 8 Single inlet coupling

- For coupling drive. Generally as arrangement 1 but pedestal extended to receive motor.



MAN COOLER

For comfort of personnel

- Ruggedly built with heavy duty motor
- Wide industrial application.
- Also ideal for cooling brick kilns, cooling bottles in glass works, external cooling of annealing furnaces, cooling industrial electrical apparatus etc.
- Minimum maintenance
- Available in three categories: Pedestal, Bracket & Tubular.
- Cast aluminium high grade alloy aerofoil impeller.
- Also available with flame proof motors.



TECHNICAL SPECIFICATION

NOMINAL SWEEP (INCHES/ MM)	ENCLOSURE (R.P.M.)	CONSTRUCTION H.P.	TOTAL AIR DELIVERY	MINIMUM PEAK AIR VELOCITY AT A DISTANCE OF	
			at 10 times Blade Sweep (m ³ / h)	10 times Blade Sweep (m/ min.)	15 times Blade Sweep (m/ min.)
19" (483 mm)	2900	3	22000	250	200
24" (610 mm)	1440	1	28000	250	150
30" (762 mm)	1440	2	37500	250	150
36" (914 mm)	960	2	56000	250	150
	1440	3	65000	275	175
48" (1220 mm)	960	5	74500	250	150

Motors are generally available for 415 volts $\pm 10\%$, 50 Hz $\pm 5\%$, 3 Phase AC supply.
Performance figures of the fans are based on tests as per IS : 6272 with the tolerances mentioned therein.

SHOP FLOOR COMFORT

Personnel's health and well-being are essential for consistent quality output. Marathon Man Coolers provide the necessary fresh air, so essential for upkeep of personnel's health in humid and dusty environment.

Marathon® Industrial Cooling Fans are excellently engineered for such a cooling need and finds acceptance in high temperature environments such as steel plants and foundries. These fans play an effective part in cooling the body by producing a high velocity air stream over long distances to rapidly vaporize perspiration. The air stream sets in motion the surrounding air which becomes progressively greater in volume with the distances covered the column. A heavy steel tubular support is provided for mounting the fan. The air stream may be adjusted in horizontal and vertical plane by providing proper installation arrangement. Wire-guard is also provided for both sides of the impeller for protection.

IS 6272 : 1987 : Industrial cooling fans (mancoolers)



TUBULAR TYPE

In Tubular Type Man Cooler, impeller and motor assembly are placed in a tubular cradle fitted with heavy feet for floor mounting.

Easily moveable from place to place, arrangement can be made, if necessary, for adjustment of the air stream through vertical plane only.

Wire-guards are provided at both sides of the casing which houses the fan assembly. This long casing helps to channelise the air stream effectively over a long distance.



BRACKET TYPE

The Bracket Type Man Cooler is suitable for mounting on the wall or the column. A heavy steel tubular support is provided for mounting the fan. The air stream may be adjusted in horizontal and vertical plane by providing tilting arrangement. Wire-guard is also provided for both sides of the impeller for protection.



PEDESTAL TYPE

Pedestal Type Man Cooler is designed to be placed on the floor. Impeller and the Motor are mounted on a heavy base and steel supporting column. Wire guard is provided on both sides of the impeller for protection.

The air stream may be adjusted in vertical and horizontal plane by providing tilting head arrangement.

OTHER PRODUCTS



Pedestal Air Circulators
size 24"



Pedestal Man Cooler
size 19" to 36"



Tubular Man Cooler
size 19" to 48"



Bracket Air Circulators
size 24" to 30"



Bracket Man Cooler
size 19" to 36"



Propeller Fan BVN/ BVA
size 18" to 36"



Propeller Fan GPN
size 12" to 18"

marathon[®]
Motors

Industrial Systems

Marathon Electric Motors (India) Ltd.

1, Taratala Road, Kolkata,
West Bengal, 700024 INDIA

T: 033-44030501 / 033-44030502

Contact us:

Banerjee Nirmalya: Nirmalya.Banerjee@RegalRexnord.com

Vivek Sharma: Vivek.Sharma@RegalRexnord.com

Sudipto Chattopadhyay: Sudipto.Chattopadhyay@RegalRexnord.com

www.regalrexnord.com

The proper selection and application of products and components, including assuring that the product is safe for its intended use, are the responsibility of the customer. To view our Application Considerations, please visit <https://www.regalrexnord.com/Application-Considerations>

To view our Standard Terms and Conditions of Sale, please visit <https://www.regalrexnord.com/Terms-and-Conditions-of-Sale> (which may redirect to other website locations based on product family).

"Regal Rexnord" is not indicative of legal entity.

Regal Rexnord, Marathon and Marathon Fans are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2022 Regal Rexnord Corporation, All Rights Reserved.

MCC21012E • Form# SB0293E

RegalRexnord[™]